

 **PH36**

Encoder with measurement range
up to 31 revolutions



- Housing diameter 36 mm
- Protection class up to IP67/IP69
- True-absolute measurement principle
- Wear and maintenance free

Product versions



Analog output



Analog output, programmable / tare function



Digital output SSI



Digital output CANopen



PH36 - Magnetic Multiturn Encoder Version with analog output

Specifications

		Order options
Shaft	Shaft 6 mm Shaft 10 mm	1 V01 V02
Measurement range	up to 31 x 360° (31 revolutions) 1 revolution, 2 revolutions ... up to 31 revolutions	2 1T 2T ... 31T
Output	Voltage 0.5 ... 10 V Voltage 0.5 ... 4.5 V Voltage 0.5 ... 4.5 V Current 4 ... 20 mA, 3 wire	3 U2 U6 U8 I1
Resolution	Up to 16 bit	
Repeatability	0.1°	
Linearity	±(2° + 0.015% f.s.)	
Housing material	Aluminum (housing), stainless steel (shaft)	
Mounting	Clamps, mounting plate	
Protection class	IP67 shaft IP67/69 housing (with IP69 compatible connector)	
Signal characteristics	Signal increasing CW Signal increasing CCW	4 CW CCW
Connection	Connector M12 axial, 5 pin	5 M12A5
Revolutions per minute (mechanical)	10,000 r.p.m. max.	
Allowable shaft load	20 N radial, 10 N axial	
Life cycle of bearings	1.5 x 10 ¹⁰ rev. (4500 h per 6000 r.p.m.)	
Shock	DIN EN 60068-2-27:2010, 100 g/11 ms, 100 shocks	
Vibration	DIN EN 60068-2-6:2008, 20 g 10 Hz-2 kHz, 10 cycles	
Temperature range	-40 ... +85°C	
Weight	approx. 120 g	
EMC	DIN EN 61326-1:2013	

Order code

PH36 – **1** – **2** – **3** – **4** – **5**

Order example: PH36 – V01 – 31T – I1 – CW – M12A5



PH36 - Magnetic Multturn Encoder

Version with analog output, programmable / tare function

Specifications

		Order options
Shaft	Shaft 6 mm Shaft 10 mm	1 V01 V02
Measurement range	up to 31 x 360° (31 revolutions) 1 revolution, 2 revolutions ... up to 31 revolutions	2 1T 2T ... 31T
Output	Voltage 0.5 ... 10 V, programmable Voltage 0.5 ... 4.5 V, programmable Voltage 0.5 ... 4.5 V, programmable Current 4 ... 20 mA, 3 wire, programmable	3 U2/PMU U6/PMU U8/PMU I1/PMU
	Voltage 0.5 ... 10 V, tare function Voltage 0.5 ... 4.5 V, tare function Voltage 0.5 ... 4.5 V, tare function Current 4 ... 20 mA, 3 wire, tare function	U2/PMZ U6/PMZ U8/PMZ I1/PMZ
Resolution	Up to 16 bit	
Repeatability	0.1°	
Linearity	±(2° + 0.015% f.s.)	
Housing material	Aluminum (housing), stainless steel (shaft)	
Mounting	Clamps, mounting plate	
Protection class	IP67 shaft IP67/69 housing (with IP69 compatible connector)	
Signal characteristics	Signal increasing CW Signal increasing CCW	4 CW CCW
Connection	Connector M12 axial, 5 pin	5 M12A5
Revolutions per minute (mechanical)	10,000 r.p.m. max.	
Allowable shaft load	20 N radial, 10 N axial	
Life cycle of bearings	1.5 x 10 ¹⁰ rev. (4500 h per 6000 r.p.m.)	
Shock	DIN EN 60068-2-27:2010, 100 g/11 ms, 100 shocks	
Vibration	DIN EN 60068-2-6:2008, 20 g 10 Hz-2 kHz, 10 cycles	
Temperature range	-40 ... +85°C	
Weight	approx. 120 g	
EMC	DIN EN 61326-1:2013	

Order code

PH36 – **1** – **2** – **3** – **4** – **5**

Order example: PH36 – V01 – 31T – U2/PMU – CW – M12A5



PH36 - Magnetic Multiturn Encoder
Version with digital output SSI



Specifications

		Order options
Shaft	Shaft 6 mm Shaft 10 mm	1 V01 V02
Measurement range	up to 31 x 360° (31 revolutions) 1 revolution, 2 revolutions ... up to 31 revolutions	2 1T 2T ... 31T
Output	Synchronous serial SSI, Gray-Code, 24 bit	3 MSSI/G/24
Resolution	$2^{14} \times 31$ (16384 x 31)	
Repeatability	0.1° or 1 LSB	
Linearity	$\pm(2^\circ + 0.015\% \text{ f.s.})$	
Housing material	Aluminum (housing), stainless steel (shaft)	
Mounting	Clamps, mounting plate	
Protection class	IP67 shaft IP67/69 housing (with IP69 compatible connector)	
Signal characteristics	Signal increasing CW Signal increasing CCW	4 CW CCW
Connection	Connector M12 axial, 8 pin	5 M12A8
Revolutions per minute (mechanical)	10,000 r.p.m. max.	
Allowable shaft load	20 N radial, 10 N axial	
Life cycle of bearings	1.5×10^{10} rev. (4500 h per 6000 r.p.m.)	
Shock	DIN EN 60068-2-27:2010, 100 g/11 ms, 100 shocks	
Vibration	DIN EN 60068-2-6:2008, 20 g 10 Hz-2 kHz, 10 cycles	
Temperature range	-40 ... +85°C	
Weight	approx. 120 g	
EMC	DIN EN 61326-1:2013	

Order code

PH36 – **1** – **2** – **3** – **4** – **5**

Order example: PH36 – V01 – 31T – MSSI/G/24 – CW – M12A8



PH36 - Magnetic Multiturn Encoder Version with digital output CANopen



Specifications


		Order options
Shaft	Shaft 6 mm Shaft 10 mm	1 V01 V02
Measurement range	up to 31 x 360° (31 revolutions) 1 revolution, 2 revolutions ... up to 31 revolutions	2 1T 2T ... 31T
Output	CANopen (CiA 301-V4.02/406-V3.2) CAN SAE J1939	3 MCANOP MCANJ1939
Resolution	14 bit per revolution	
Repeatability	0.1°	
Linearity	±1°	
Housing material	Aluminum (housing), stainless steel (shaft)	
Mounting	Clamps, mounting plate	
Protection class	IP67 shaft IP67/69 housing (with IP69 compatible connector)	
Connection	Connector M12 axial, 5 pin	4 M12A5/CAN
Revolutions per minute (mechanical)	10,000 r.p.m. max.	
Allowable shaft load	20 N radial, 10 N axial	
Life cycle of bearings	1.5 x 10 ¹⁰ rev. (4500 h per 6000 r.p.m.)	
Shock	DIN EN 60068-2-27:2010, 100 g/11 ms, 100 shocks	
Vibration	DIN EN 60068-2-6:2008, 20 g 10 Hz-2 kHz, 10 cycles	
Temperature range	-40 ... +85°C	
Weight	approx. 120 g	
EMC	DIN EN 61326-1:2013	

Order code

PH36 – **1** – **2** – **3** – **4**

Order example: PH36 – V01 – 31T – MCANOP – M12A5/CAN

Dimensions

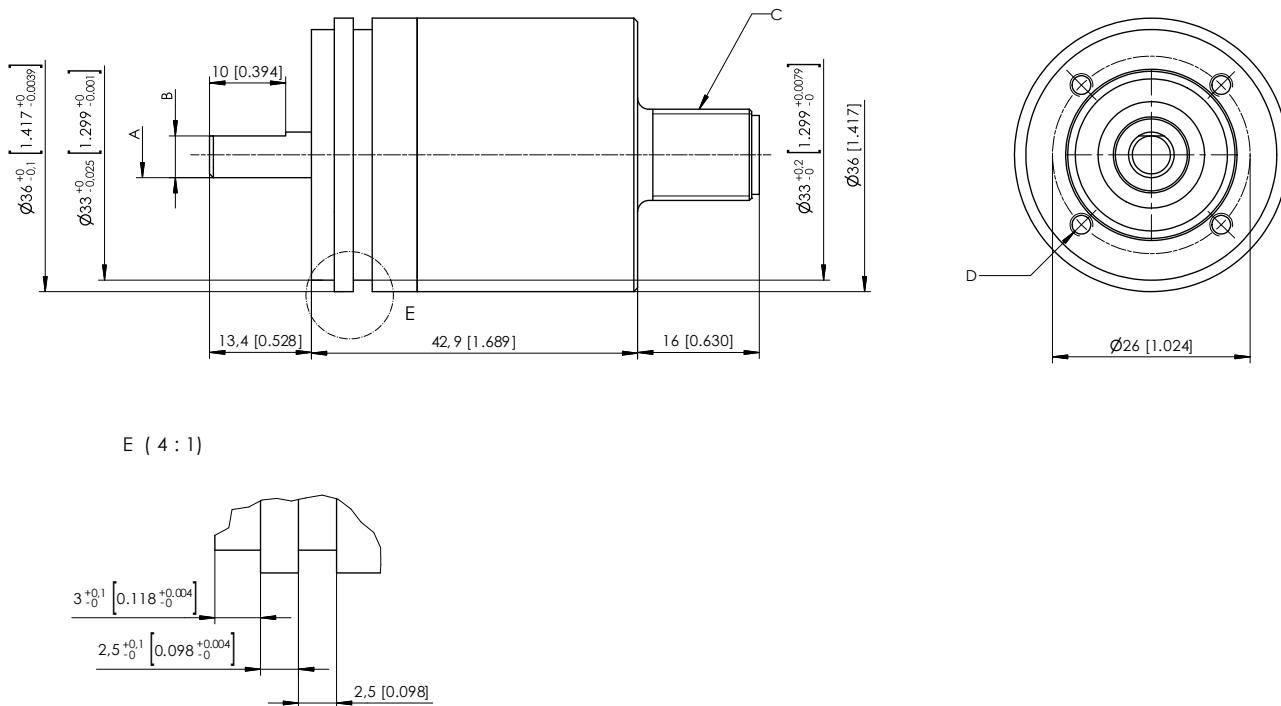

C – Connector M12

D – 4 x M3 – 5 [0.197] deep

Dimensions in mm [inch].

Dimensions informative only.

For guaranteed dimensions consult factory.

Dimensions shaft


Dim.	V01	V02
A	$\varnothing 6\text{f}6$ -0,01 -0,018	$\varnothing 10\text{f}6$ -0,013 -0,022
	$[0.236 \quad -0.0004 \quad -0.0007]$	$[0.394 \quad -0.0005 \quad -0.0009]$
B	5,5 [0.217]	9 [0.354]

Output specification

Analog output

U2	Excitation voltage	8 ... 36 V DC
Voltage output 0.5 ... 10 V	Excitation current	20 mA typical at 24 V DC 38 mA typical at 12 V DC max. 50 mA
	Output voltage	0.5 ... 10 V DC
	Output current	2 mA max.
	Measuring rate	1 kHz standard
	Stability (temperature)	$\pm 50 \times 10^{-6} / ^\circ\text{C}$ f.s. (typical)
	Protection	Reverse polarity, short circuit
	Operating temperature	See specification of the respective sensor
	EMC	DIN EN 61326-1:2013
U6	Excitation voltage	5 V DC $\pm 5\%$
Voltage output 0.5 ... 4.5 V	Excitation current	typical 140 mA max.
	Output voltage	0.5 ... 4.5 V DC
	Output current	2 mA max.
	Measuring rate	1 kHz standard
	Stability (temperature)	$\pm 50 \times 10^{-6} / ^\circ\text{C}$ f.s. (typical)
	Protection	Reverse polarity, short circuit
	Operating temperature	See specification of the respective sensor
	EMC	DIN EN 61326-1:2013
U8	Excitation voltage	8 ... 36 V DC
Voltage output 0.5 ... 4.5 V	Excitation current	17 mA typical at 24 V DC 32 mA typical at 12 V DC 50 mA max.
	Output voltage	0.5 ... 4.5 V DC
	Output current	2 mA max.
	Measuring rate	1 kHz standard
	Stability (temperature)	$\pm 50 \times 10^{-6} / ^\circ\text{C}$ f.s. (typical)
	Protection	Reverse polarity, short circuit
	Operating temperature	See specification of the respective sensor
	EMC	DIN EN 61326-1:2013

I1	Excitation voltage	8 ... 36 V DC
Current output 4 ... 20 mA, 3 wires	Excitation current	typical 36 mA at 24 V DC typical 70 mA at 12 V DC 120 mA max.
	Load R_L	500 Ω max.
	Output current	4 ... 20 mA
	Measuring rate	1 kHz standard
	Stability (temperature)	$\pm 50 \times 10^{-6} / ^\circ\text{C}$ f.s. (typical)
	Protection	Reverse polarity, short circuit
	Operating temperature	See specification of the respective sensor
	EMC	DIN EN 61326-1:2013

Signal wiring	Output signals	Connector pin no.	Cable color
Connector M12, 5 pin	Excitation +	1	brown
	Signal	2	white
	GND	3	blue
	Do not connect!	4	black
View to the sensor connector	Do not connect!	5	(grey)


Analog output, programmable / tare function

U2/PMU programmable	Excitation voltage	8 ... 36 V DC
U2/PMZ tare function	Excitation current	20 mA typical at 24 V DC
Voltage output		38 mA typical at 12 V DC
0.5 ... 10 V		max. 50 mA
	Output voltage	0,5 ... 10 V DC
	Output current	2 mA max.
	Measuring rate	1 kHz standard
	Stability (temperature)	$\pm 50 \times 10^{-6} / ^\circ\text{C}$ f.s. (typical)
	Protection	Reverse polarity, short circuit
	Operating temperature	See specification of the respective sensor
	EMC	DIN EN 61326-1:2013

U6/PMU programmable	Excitation voltage	5 V DC $\pm 5\%$
U6/PMZ tare function	Excitation current	typical 140 mA
Voltage output	Output voltage	0.5 ... 4.5 V DC
0.5 ... 4.5 V	Output current	2 mA max.
	Measuring rate	1 kHz standard
	Stability (temperature)	$\pm 50 \times 10^{-6} / ^\circ\text{C}$ f.s. (typical)
	Protection	Reverse polarity, short circuit
	Operating temperature	See specification of the respective sensor
	EMC	DIN EN 61326-1:2013

U8/PMU programmable	Excitation voltage	8 ... 36 V DC
U8/PMZ tare function	Excitation current	17 mA typical at 24 V DC
Voltage output		32 mA typical at 12 V DC
0.5 ... 4.5 V		max. 50 mA
	Output voltage	0.5 ... 4.5 V DC
	Output current	2 mA max.
	Measuring rate	1 kHz standard
	Stability (temperature)	$\pm 50 \times 10^{-6} / ^\circ\text{C}$ f.s. (typical)
	Protection	Reverse polarity, short circuit
	Operating temperature	See specification of the respective sensor
	EMC	DIN EN 61326-1:2013

I1/PMU programmable	Excitation voltage	8 ... 36 V DC
I1/PMZ tare function	Excitation current	typical 36 mA at 24 V DC typical 70 mA at 12 V DC max. 120 mA
Current output 4 ... 20 mA, 3 wire	Load R_L	500 Ω max.
	Output current	4 ... 20 mA
	Measuring rate	1 kHz standard
	Stability (temperature)	$\pm 50 \times 10^{-6} / ^\circ\text{C}$ f.s. (typical)
	Protection	Reverse polarity, short circuit
	Operating temperature	See specification of the respective sensor
	EMC	DIN EN 61326-1:2013

Signal wiring	Output signals	Connector pin no.	Cable color
Connector M12, 5 pin	Excitation +	1	brown
	Signal	2	white
	GND	3	blue
	Do not connect!	4	black
View to the sensor connector	SPAN/ZERO	5	grey

Output .../PMU

Programming of the start and end value by the customer (programmable)

Teach-In of start and end value for the analog outputs U2/PMU, U8/PMU, I1/PMU is provided by a binary signal SPAN/ZERO. At the start position connect signal SPAN/ZERO for a period of 2 ... 3 seconds to GND via push button. At the end position connect signal SPAN/ZERO for a period of 5 ... 6 seconds to GND via a push button. The scaling range will be stored non-volatile.

To reset the sensor to factory default ZERO/END must be connected to ground while powering up the sensor for 2 ... 3 seconds.

Output .../PMZ

Programming of the zero point by the customer (tare function)


Teach-In of the zero point for the analog outputs U2/PMZ, U6/PMZ, U8/PMZ and I1/PMZ is provided by a binary signal SPAN/ZERO. At the start position connect signal SPAN/ZERO for a period of 2 ... 3 seconds to GND via push button. The sensitivity of the output signal remains unchanged. The programmed position will be stored non-volatile. To reset the sensor to the factory values the button must be pushed for a period of 2 ... 3 seconds when the sensor is switched on.

Digital output


MSSI	Interface	EIA RS-422
Synchronous serial SSI	Excitation voltage	8 ... 36 V DC
	Excitation current	19 mA typical at 24 V DC 35 mA typical at 12 V DC max. 80 mA
	Clock frequency	100 kHz ... 500 kHz
	Code	Gray-Code, continuous progression
	Delay between pulse trains (t_p)	30 µs min.
	Stability (temperature)	$\pm 50 \times 10^{-6} / {^\circ}\text{C}$ f.s. (typical)
	Operating temperature	See specification of the respective sensor
	Protection	Reverse polarity, short circuit
	EMC	DIN EN 61326-1:2013

Data format


(Train of 26 pulses)

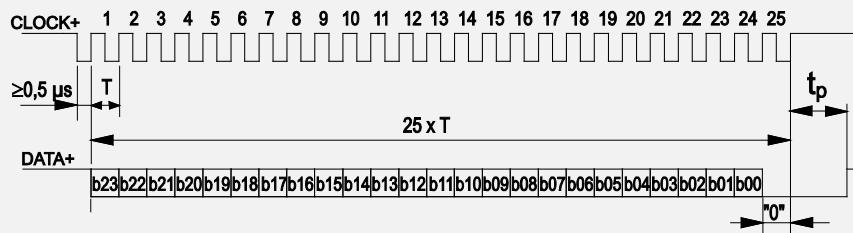

Transmission rate	Cable length	Baud rate	Note:
	50 m	100-400 kHz	Extension of the cable length will reduce the maximum transmission rate.
	100 m	100-300 kHz	


Signal wiring	Output signals	Connector pin no.	Cable color
Connector M12, 8 pin	Excitation +	1	white
	Excitation GND	2	brown
	CLOCK	3	green
	CLOCK	4	yellow
	DATA	5	grey
	DATA	6	pink
	-	7	blue
	-	8	red

View to the sensor connector



CANOP

CANopen




CAN Specification	ISO 11898, Basic and Full CAN 2.0 B
Communication profile	CANopen CiA 301 V 4.02, Slave
Device profile	Encoder CiA 406 V 3.2
Configuration services	Layer Setting Service (LSS), CiA Draft Standard 305 (transmission rate, node id)
Error Control	Node Guarding, Heartbeat, Emergency Message
Node ID	Default: 127; programmable via LSS or SDO
PDO	3 TxPDO, 0 RxPDO, static mapping
PDO Modes	Event-/Time triggered, Remote-request, Sync cyclic/acyclic
SDO	1 server, 0 Client
CAM	8 cams
Certified	Yes
Transmission rates	50 kBaud to 1 MBaud, default: 125 kBaud; programmable via LSS or SDO
Bus connection	M12 connector, 5 pin
Integrated bus terminating resistor	Adjustable by the customer
Bus, galvanic isolated	No

Specifications

Excitation voltage	8 ... 36 V DC
Excitation current	20 mA typical at 24 V DC 40 mA typical at 12 V DC, 80 mA max.
Resolution	0.05° max.
Stability (temperature)	$\pm 50 \times 10^{-6}/^{\circ}\text{C}$ f.s. (typical)
Repeatability	1 LSB
Operating temperature	See specification of the respective sensor
Protection	Reverse polarity, short circuit
Dielectric strength	1 kV (V AC, 50 Hz, 1 min.)
EMC	DIN EN 61326-1:2013

Signal wiring
Connector M12, 5 pin



View to the sensor connector


Output signals	Connector pin no.	Cable color
Shield	1	brown
Excitation +	2	white
GND	3	blue
CAN-H	4	black
CAN-L	5	grey

MCANJ1939	CAN Specification	ISO 11898, Basic and Full CAN 2.0 B
SAE J1939	Transceiver	24V-compliant, not isolated
	Communication profile	SAE J1939
	Baud Rate	250 kbit/s
	Internal termination resistor	120 Ω adjustable by the customer
	Address	Default 247d, configurable

NAME Fields	Arbitrary address capable	1	Yes
	Industry group	0	Global
	Vehicle system	7Fh (127d)	Non specific
	Vehicle system instance	0	
	Function	FFh (255d)	Non specific
	Function instance	0	
	ECU instance	0	
	Manufacturer	145h (325d)	Manufacturer ID
	Identity number	0nnn	Serial number 21 bit

Parameter Group Numbers (PGN)	Configuration data	PGN EF00h	Proprietary-A (PDU1 peer-to-peer)
	Process data	PGN FFnnh	Proprietary-B (PDU2 broadcast); nn Group Extension (PS) configurable

Specifications	Excitation voltage	8 ... 36 V DC
	Excitation current	20 mA typical at 24 V DC 40 mA typical at 12 V DC max. 80 mA
	Measuring rate	1 kHz (asynchronous)
	Stability (temperature)	±50 x 10 ⁻⁶ /°C f.s. (typical)
	Repeatability	1 LSB
	Operating temperature	See specification of the respective sensor
	Protection	Reverse polarity, short circuit
	Dielectric strength	1 kV (V AC, 50 Hz, 1 min.)
	EMV	EN 61326-1:2013

Signal wiring Connector M12, 5 pin	Output signals	Connector pin no.	Cable color
	Shield	1	brown
	Excitation +	2	white
	GND	3	blue
	CAN-H	4	black
	CAN-L	5	grey

View to the sensor connector

Connector cables

Connector cable M12, 4 pin

(angular coupling)


shielded connector

Suitable for 5-pin
sensor connectors

The 4-core screened cable is supplied
with a mating 4-pin 90° M12 connector at
one end and 4 wires at the other end.
Available lengths are 2 m, 5 m and 10 m.

Wire: cross sectional area 0.34 mm²

Cable diameter: 5.6 ±0.2 mm

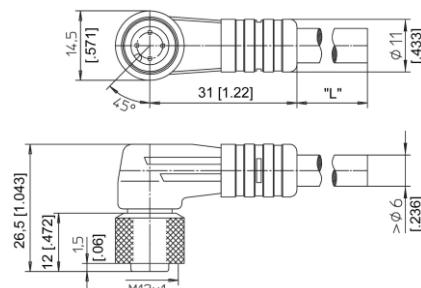

Order code

KAB - xM - M12/4F/W - LITZE

IP69: **KAB - xM - M12/4F/W/69K - LITZE**

xM = length in m

Connector cable M12, 4 pin

(straight coupling)


shielded connector

Suitable for 5-pin
sensor connectors

The 4-core screened cable is supplied
with a mating 4-pin M12 connector at
one end and 4 wires at the other end.
Available lengths are 2 m, 5 m and 10
m.

Wire: cross sectional area 0.34 mm²

Cable diameter: 5.6 ±0.2 mm

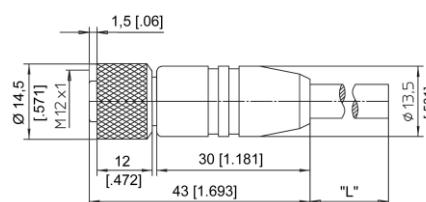

Order code

KAB - xM - M12/4F/G - LITZE

IP69: **KAB - xM - M12/4F/G/69K - LITZE**

xM = length in m

Signal wiring	Plug connection / cable color			
	1	2	3	4
M12, 4 pin	1 brown	2 white	3 blue	4 black

Applicable for cable carriers

Maximum movement speed	3 m/s
Maximum acceleration	5 m/s ²
Minimum bending radius	10 x cable diameter

Connector cable M12, 5 pin


(angular coupling)

shielded connector

The 5-core screened cable is supplied with a mating 5-pin 90° M12 connector at one end and 4 wires at the other end. Available lengths are 2 m, 5 m and 10 m.

Wire: cross sectional area 0.34 mm²

Cable diameter: 5.6 ±0.2 mm

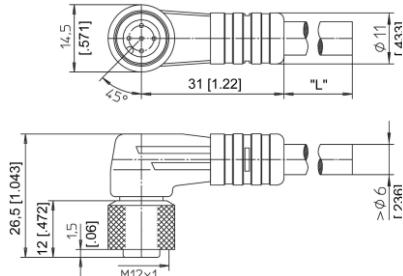

Order code

KAB - xM - M12/5F/W - LITZE

IP69:	KAB - xM - M12/5F/W/69K - LITZE
-------	--

xM = length in m

Connector cable M12, 5 pin


(straight coupling)

shielded connector

The 5-core screened cable is supplied with a mating 5-pin M12 connector at one end and 4 wires at the other end. Available lengths are 2 m, 5 m and 10 m.

Wire: cross sectional area 0.34 mm²

Cable diameter: 5.6 ±0.2 mm

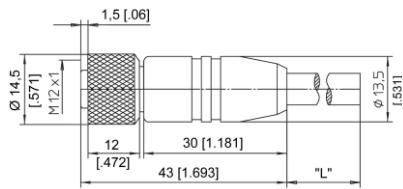

Order code

KAB - xM - M12/5F/G - LITZE

IP69:	KAB - xM - M12/5F/G/69K - LITZE
-------	--

xM = length in m

Signal wiring M12, 5 pin	Plug connection / Cable color				
	1	2	3	4	5
	brown	white	blue	black	grey

Applicable for cable carriers


Maximum movement speed	3 m/s
Maximum acceleration	5 m/s ²
Minimum bending radius	10 x cable diameter

Connector cable M12, 8 pin

(angular coupling)

shielded connector

The 8-lead shielded cable is supplied with a mating 8-pin 90° M12 connector at one end and 8 wires at the other end. Available lengths are 2 m, 5 m and 10 m. Wire: cross sectional area 0.25 mm² Cable diameter: 6.3 ±0.2 mm

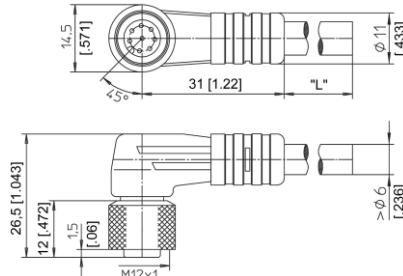

Order code

KAB - xM - M12/8F/W - LITZE

IP69: **KAB - xM - M12/8F/W/69K - LITZE**


xM = length in m

Connector cable M12, 8 pin

(straight coupling)

shielded connector

The 8-lead shielded cable is supplied with a mating 8-pin M12 connector at one end and 8 wires at the other end. Available lengths are 2 m, 5 m and 10 m. Wire: cross sectional area 0.25 mm² Cable diameter: 6.3 ±0.2 mm

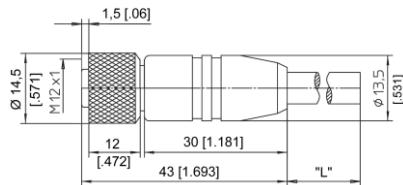

Order code

KAB - xM - M12/8F/G - LITZE

IP69: **KAB - xM - M12/8F/G/69K - LITZE**

xM = length in m

Signal wiring M12, 8 pin	Plug connection / cable color							
	1	2	3	4	5	6	7	8
	white	brown	green	yellow	grey	pink	blue	red

Applicable for cable carriers


Maximum movement speed	3 m/s
Maximum acceleration	5 m/s ²
Minimum bending radius	10 x cable diameter

Connector/bus cable M12, 5 pin CAN-Bus

The 5-lead shielded cable is supplied with a female 5 pin M12 connector at one end and a male 5 pin M12 connector at the other end.

Available lengths are 0.3 m, 2 m, 5 and 10 m.

Cable diameter: 6.7 ± 0.2 mm

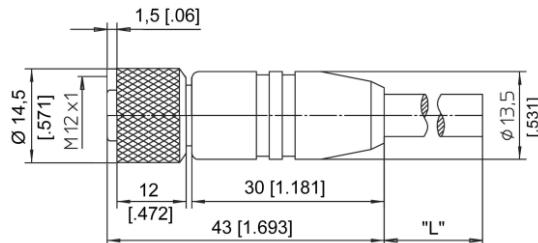

Order code

KAB - xM - M12/5F/G - M12/5M/G - CAN

IP69: **KAB - xM - M12/5F/G/69K - M12/5M/G/69K - CAN**

xM = length in m

T-connector for bus cable M12, 5 pin CAN-Bus

Order code

KAB - TCONN - M12/5M - 2M12/5F - CAN



Terminating resistor M12, 5 pin CAN-Bus

Order code

KAB - RTERM - M12/5M/G - CAN




Applicable for cable carriers

Maximum movement speed	3 m/s
Maximum acceleration	5 m/s ²
Minimum bending radius	10 x cable diameter

Accessories

Mounting clamps (PH36)


Mounting clamp BFS1

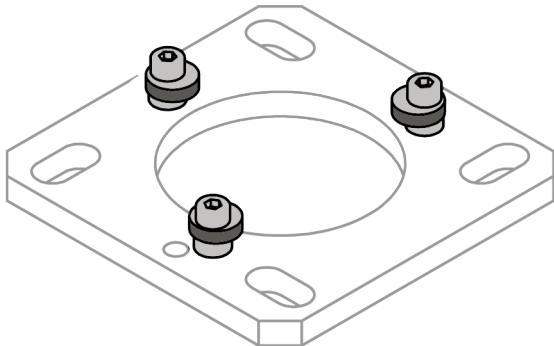

Order code:

PRPT-BFS1


Mounting clamp BFS2

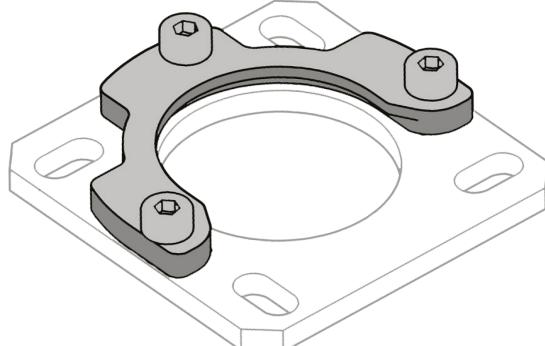

Order code:

PRPT-BFS2

Mounting possibilities (PH36)

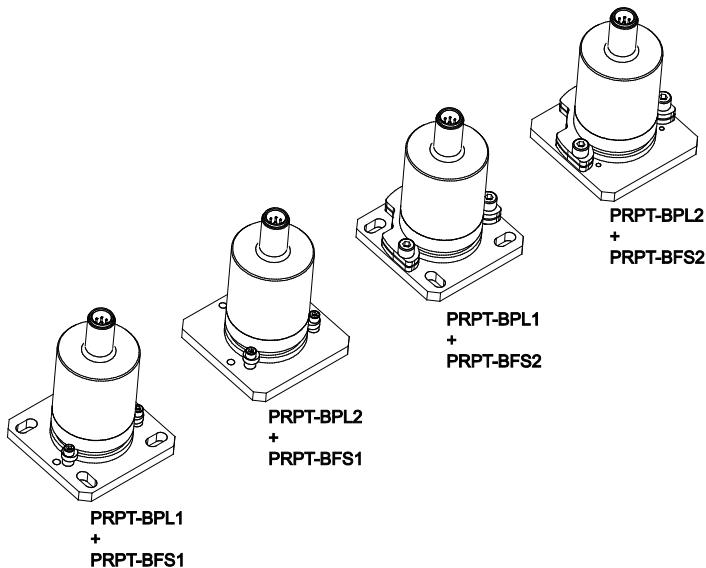

PRPT-BPL1

(Screw mounting)


In combination with the mounting clamps PRPT-BFS1 (3 x M2.5) or in combination with the mounting bracket PRPT-BFS2 (3 x M4).

Dimensions in mm [inch].

Weight 30 g approx.

Dimensions informative only.

For guaranteed dimensions please consult factory.

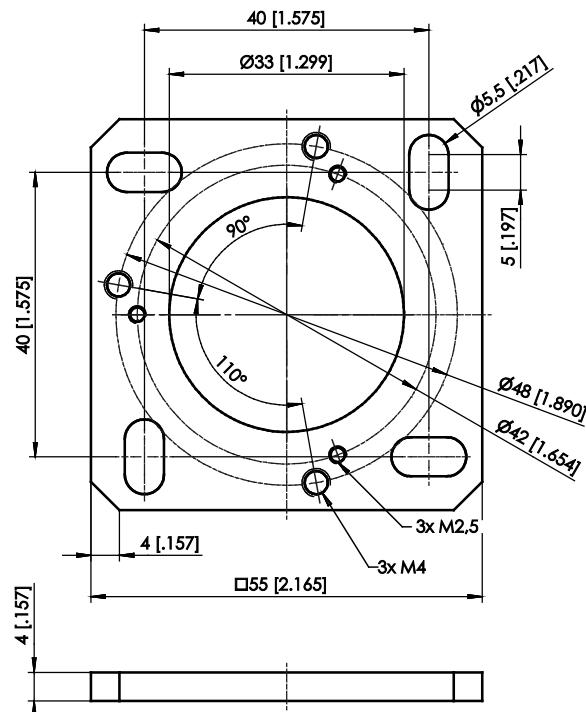

PRPT-BPL2

(Welding assembly)


In combination with the mounting clamps PRPT-BFS1 (3 x M2.5) or in combination with the mounting bracket PRPT-BFS2 (3 x M4).

Dimensions in mm [inch].

Weight 30 g approx.


Dimensions informative only.

For guaranteed dimensions please consult factory.

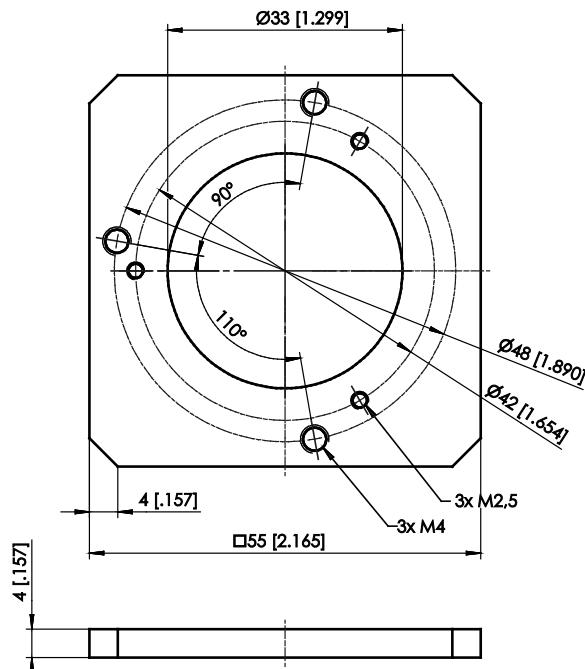

PRPT-BPL3

In combination with PH36
and frontal mounting.

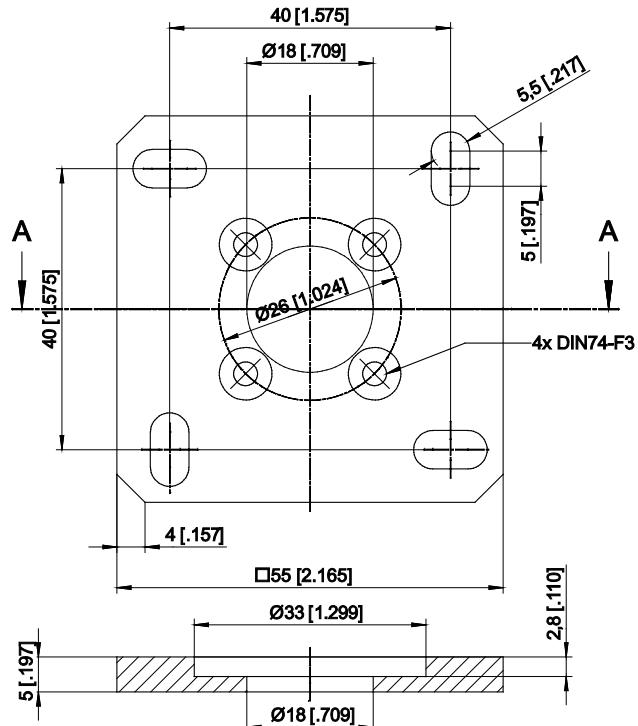

Dimensions in mm [inch].

Weight 30 g approx.

Dimensions informative only.

For guaranteed dimensions please consult
factory.